


Clark Headboard System



Headboard With Crane Cut Out

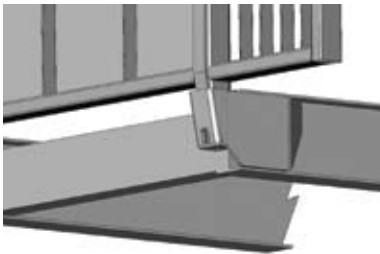

Headboard Mounts To Chassis
 In Tapered Sockets



The Clark EX330 Truck Headboard is designed to allow free airflow through the headboard, whilst offering strength and lightness. Constructed around two Exte 144 one piece stakes and weld on sockets, the headboard has exceptional strength and resistance to bending. The headboard is attached to the truck chassis by two weld on tapered sockets to allow easy removal, but stays secure and rattle free in use. Clark EX330 headboards can be manufactured to suit customer requirements - standard dimensions are 2.55m wide x 2.80 m high with a solid centre plate for the attachment of air pipe mountings etc. A centre cut out can also be provided for crane parking when required. Approximate weight for a standard headboard excluding socket mountings is 330kg.

Clark Bolster Rams

We can manufacture moveable bolster rams to order, in stroke lengths up to 4 metres. Normally supplied complete with pivot lugs and bolts and centre tie down U bolt.

Standard Bolster Ram Dimensions

| Stroke | Open Centres | Closed Centres | Cyl. Dia | Shaft Dia | Part No |
|--------|--------------|----------------|----------|-----------|---------|
| 2.0m | 4287mm | 2287mm | 100mm | 60mm | BLR20 |
| 2.5m | 5287mm | 2787mm | 100mm | 60mm | BLR25 |
| 3.0m | 6287mm | 3287mm | 100mm | 60mm | BLR30 |
| 3.5m | 7287mm | 3787mm | 100mm | 60mm | BLR35 |
| 4.0m | 8287mm | 4287mm | 100mm | 60mm | BLR40 |

Pivot Pin diameter 40mm
 Pivot Eye Width • Shaft 60mm • Cyl Base 120mm



Other Stroke Lengths And Ram
 Dimensions Can Be Made To Order

Tapio 13

A single diamond twisted chain for smaller forest machines and for use on narrower tyres. Available in 13mm or 16mm.



Matti W 2T

A double diamond chain offering excellent grip and a good wear resistance. Available in 13mm or 16mm.



Matti W 3T

Matti W Triple Diamond offers the best possible grip a tyre chain can offer. Especially designed for tyre width 650mm or wider.



★ ★ ★ ★ ★ TRACTION
★ ★ ★ ★ ★ PROTECTION

★ ★ ★ ★ ★ TRACTION
★ ★ ★ ★ ★ PROTECTION

★ ★ ★ ★ ★ TRACTION
★ ★ ★ ★ ★ PROTECTION

| Tyre Size | 13mm Chain |
|-------------|------------|
| 600/50-22.5 | ✓ |
| 600/50-26.5 | ✓ |
| 650/50-26.5 | ✓ |
| 700/45-22.5 | ✓ |
| 700/50-26.5 | ✓ |
| 16.9-30 | ✓ |
| 16.9-34 | ✓ |
| 16.9-38 | ✓ |
| 18.4-26 | ✓ |
| 18.4-30 | ✓ |
| 18.4-34 | ✓ |
| 18.4-38 | ✓ |
| 23.1-26 | ✓ |

| Tyre Size | 13mm Chain | 16mm Chain |
|-------------|------------|------------|
| 500/60-22.5 | ✓ | ✗ |
| 500/60-26.5 | ✓ | ✗ |
| 600/50-22.5 | ✓ | ✗ |
| 600/55-26.5 | ✓ | ✓ |
| 600/65-34 | ✓ | ✓ |
| 700/45-22.5 | ✓ | ✗ |
| 700/50-26.5 | ✓ | ✓ |
| 700/55-34 | ✗ | ✓ |
| 700/70-34 | ✗ | ✓ |
| 800/40-26.5 | ✗ | ✓ |
| 18.4-34 | ✗ | ✓ |
| 20.5-25 | ✗ | ✓ |
| 23.1-26 | ✗ | ✓ |

| Tyre Size | 13mm Chain | 16mm Chain |
|-------------|------------|------------|
| 600/50-22.5 | ✓ | ✗ |
| 600/55-26.5 | ✓ | ✓ |
| 600/65-34 | ✗ | ✓ |
| 650/65-26.5 | ✗ | ✓ |
| 700/45-22.5 | ✓ | ✗ |
| 700/50-26.5 | ✓ | ✓ |
| 700/55-34 | ✗ | ✓ |
| 700/70-34 | ✗ | ✓ |
| 750/55-26.5 | ✗ | ✓ |

19mm Chain And Other Sizes Are Available To Order, Please Contact Sales For Tyre Chain Fitting Tools And Accessories, See Page 4



Matti Protec 16mm

A further development of the Matti W chain design, the Protec chain offers a wider pattern extending down the tyre side wall to the side chain, offering greater side wall tyre protection and an excellent tyre hugging chain.



| Tyre Size | 16mm Chain |
|-------------|------------|
| 600/55-26.5 | ✓ |
| 700/50-26.5 | ✓ |
| 710/45-26.5 | ✓ |
| 750/55-26.5 | ✓ |
| 700/55-34 | ✓ |



★ ★ ★ ★ ★ TRACTION
★ ★ ★ ★ ★ PROTECTION



Heavy Duty Ring Lug Chains



Heavy Duty - 28mm Main Ring - 16mm Chain
Extra Heavy duty - 28mm Main ring - 19mm Chain

Heavy Duty Ring Lug Chains are manufactured from heat treated Boron alloy steel and offer the ultimate in traction with a long working life.

| Tyre Size | Heavy Duty | Extra Heavy Duty |
|-------------|------------|------------------|
| 16.9 - 30 | ✓ | X |
| 16.9 - 34 | ✓ | X |
| 18.4 - 26 | ✓ | X |
| 18.4 - 30 | ✓ | ✓ |
| 18.4 - 34 | ✓ | ✓ |
| 23.1 - 26 | ✓ | ✓ |
| 23.1 - 34 | ✓ | ✓ |
| 24.5 - 32 | ✓ | ✓ |
| 28.1 - 26 | ✓ | ✓ |
| 30.5 - 32 | ✓ | ✓ |
| 35.5 - 32 | ✓ | X |
| 700/55 - 34 | X | ✓ |
| 700/70 - 34 | ✓ | X |

★ ★ ★ ★ ★ TRACTION
★ ★ ★ ★ ★ PROTECTION



OFA LS/LS Dual Tyre Chains

Optimized pattern of cross chains ensures that at all times, a proportion of the chain is between the dual tyres and the terrain. The wear chain has unstudded links from 8mm and/or 9mm square wire, depending on tyre size.



OFA LS/SS Dual Tyre Chains

Particularly designed for log-hauling trucks and in general for terrains demanding improved lateral grip. The wear chain has unstudded links from 8 and/or 9mm square wire, depending on tyre size.



OFA LS Single Tyre Chains

General purpose chain for both the front tyres and the outer tyre of dual tyres. The wear chain has unstudded links from 8 and/or 9mm square wire, depending on tyre size.



The new screw type Speedy Chain Tensioner tool combines compact design with light weight and ease of use. Incorporating a special acme screw thread which offers excellent tensioning combined with fast operation, the new tool is operated via a standard 1/2" drive ratchet and socket. The new tensioner has two chain fitting options - chain hooks to grip inside the link or chain grabs to grip on the end of the link.

'Speedy' Tyre Chain Tensioning Tool



STT350

Tyre Chain Accessories

Weld Repair Links

- 8mm WRL8
- 9mm WRL9
- 11mm WRL11
- 13mm WRL13
- 16mm WRL16
- 19mm WRL19



Chain Coupling Links

- 7mm K0501
- 10mm K0502
- 13mm K0503
- 16mm K0504



X Type Joining Links

- 11mm X-TJL11
- 13mm X-TJL13
- 16mm X-TJL16
- 19mm X-TJL19



Plug Coupling Links

- 5mm PCL5
- 6mm PCL6
- 8mm PCL8
- 10mm PCL10
- 13mm PCL13
- 16mm PCL16



Stamped Alloy D Shackles

- Pin
- 5/8" B0551
- 3/4" B0104



Galvanised D Shackles

- 10mm C0104
- 13mm C0106
- 16mm C0108
- 19mm C0109

