



At the forefront of forestry tyres, Nokian Tyres has decades of experience in designing and manufacturing tyres in close cooperation with forestry machine manufacturers. Nokian Heavy Tyres are renowned for their superb quality in extremely demanding logging and harvesting conditions - this high quality primarily means functionality, reliability and high service hours.

NOKIAN HEAVY TYRES



nokian *FOREST KING TRS LS-2*

A traction tyre with excellent grip for demanding conditions

- A low-profile, wide forestry machine traction tyre with high lugs, which endure the most difficult conditions
- Tough special rubber compound and steel fortification
- Outstanding Grip



nokian *FOREST KING TRS L-2*

Reliable grip & traction

- Wide, high lugs for good moving properties and driving comfort
- Lug angle and sharp shoulder ensure excellent lateral lug
- Normally used without tracks



nokian *TRS L-2*

A strong, self-cleaning traction tyre especially designed for harvesters.



Forest King TRS LS-2

Nokian Forest King TRS LS-2 Tyres											
Nokian Product Code	Dimension	PR	Rim	Section mm	Diameter mm	Static Load Radius mm $\pm 2.5\%$	Rolling Circ mm $\pm 2.5\%$	30km/h		10km/h	
								Load kg	Inf Pres bar	Load kg	Inf Pres bar
T486510	23.1-26 TT	16 SF	DW20A	587	1632	736	4857	4375	2.30	5690	2.60
T445516	28L-26 TT	16 SF	DW25A	714	1644	756	4855	4530	1.90	5900	2.20
T445373	30.5L-32 TT	20 SF	DH27A	775	1857	836	5542	5495	1.80	7145	2.10
T445515	30.5L-32 TT	26 SF	DH27	795	1853	823	5510	7100	2.80	10000	3.10

Forest King TRS L-2

Nokian Forest King TRS L-2 Tyres										
Nokian Product Code	Dimension	PR	Rim	Section mm	Diameter mm	Static Load Radius mm $\pm 2.5\%$	Rolling Circ mm $\pm 2.5\%$	30km/h Load kg	10km/h Load kg	Inflation Pressure bar
T445421	710/40-22.5 TT	16 SF	24.00	700	1150	527	3437	4010	4625	3.20
T445438	600/55-26.5 TT	16 SF	20.00	600	1340	614	4024	4550	5300	4.00
T445434	600/55-26.5 TT	20 SF	20.00	600	1340	620	4040	5510	6300	5.00
T445339	650/60-26.5 TT	12 SF	20.00	650	1485	671	4411	4550	5300	2.40
T445437	710/45-26.5 TT	16 SF	24.00	700	1340	612	4027	5220	6000	4.00
T445424	710/45-26.5 TT	20 SF	24.00	700	1340	609	4041	6420	7300	5.50
T445225	750/55-26.5 TT	20 SF	24.00	750	1485	672	4461	7810	9000	5.00

TRS L-2

Nokian TRS L-2 Tyres										
Nokian Product Code	Dimension	PR	Rim	Section mm	Diameter mm	Static Load Radius mm $\pm 2.5\%$	Rolling Circ mm $\pm 2.5\%$	30km/h Load kg	10km/h Load kg	Inflation Pressure bar
T445395	650/60-26.5 TT	20 SF	20.00	650	1485	676	4467	6740	7750	5.00





nokian *FOREST RIDER*

Driving comfort - absolute traction

- The first functional radial forestry tyre for professional use on the market. Designed for CTL forestry machines, the Forest Rider wins users over with its unique driving properties and supreme traction abilities
- Wide contact area provides supreme moving properties and is gentle on the surface
- Radial construction guarantees excellent driving comfort and minimises vibration
- Patented side puncture protection
- Low rolling resistance resulting in lower fuel consumption
- Excellent traction - tracks not necessary



nokian *FOREST KING F*

Sturdy & stable even in demanding forestry use

- A balanced shape, very stable tyre
- Straight, durable sides and a sturdy tread
- Provides excellent grip without chains and tracks. If needed, chains and tracks will fit on the tyre very well due to the tyre's shape and track support



nokian *ELS L-2*

Efficient operating hours

- Reliable low-profile tyre
- High rubber content in the tread compound ensures extensive operating hours
- Durable sidewalls with efficient steel fortification



Forest Rider

Nokian Forest Rider Tyres										
Nokian Product Code	Dimension	Load Index	Rim	Section mm	Diameter mm	Static Load Radius mm $\pm 2.5\%$	Rolling Circ mm $\pm 2.5\%$	40km/h Load kg	10km/h Load kg	Inflation Pressure bar
T445436	650/45 R 24.5 TL	161 A8	22.00	650	1230	566	3732	4625	5600	5.00
T445472	600/50 R 24.5 TL	164 A8 172 A2	20.00	600	1230	563	3726	5000	6150	5.00
T445320	600/55 R 26.5 TL	165 A8	20.00	601	1340	631	4059	5150	6300	5.00
T445408	710/45 R 26.5 TL	165 A8	24.00	710	1340	617	4040	5600	6900	5.00
T445455	710/55 R 34 TL	171 A8	24.00	710	1640	755	4977	6450	7500	4.00
T445517	710/70 R 34 TL	176 A8 183 A2	DW24B	710	1844	841	5592	7100	8750	4.00
T445462	800/50 R 26.5 TL	177 A8	AG28	800	1485	673	4530	8000	9750	5.50
T445466	600/60 R 28 TL	159 A8	DW18B	600	1431	653	4323	4375	5450	4.00
T445461	600/70 R 30 TL	165 A8	DW20B	600	1602	730	4869	5150	6300	4.00
T445460	600/65 R 34 TL	165A8	DW20B	600	1644	763	5008	5150	6300	4.00
T445464	650/65 R 38 TL	171 A8	DW20B	645	1811	834	5517	6150	7500	4.00
T445457	650/85 R 38 TL	179 A8	DW20B	645	2071	960	6321	7750	9500	4.00

Forest King F

Nokian Forest King F Tyres										
Nokian Product Code	Dimension	PR	Rim	Section mm	Diameter mm	Static Load Radius mm $\pm 2.5\%$	Rolling Circ mm $\pm 2.5\%$	40km/h Load kg	10km/h Load kg	Inflation Pressure bar
T445366	710/40-22.5 TT	16 SF	24.00	710	1171	537	3519	3550	4375	3.20
T445397	710/40-24.5 TT	20 SF	24.00	710	1230	573	3729	4875	6000	5.00
T445340	600/55-26.5 TT	20 SF	20.00	601	1340	624	4365	5150	6300	5.00
T445336	710/45-26.5 TT	16 SF	24.00	710	1340	622	4046	4625	5600	4.00
T445311	710/45-26.5 TT	20 SF	24.00	710	1340	622	4046	5600	6900	5.00
T445333	750/55-26.5 TT	20 SF	24.00	750	1485	680	4467	7300	9000	5.00
T445454	780/55 -26.5 TT	20 SF	28.00	780	1485	TBA	TBA	7750	9500	5.00
T445296	800/40-26.5 TT	20 SF	28.00	800	1340	620	4059	6000	7300	5.00

ELS L-2

Nokian ELS L-2 Tyres										
Nokian Product Code	Dimension	PR	Rim	Section mm	Diameter mm	Static Load Radius mm $\pm 2.5\%$	Rolling Circ mm $\pm 2.5\%$	30km/h Load kg	10km/h Load kg	Inflation Pressure bar
T486034	600/50-22.5 TT	16 SF	20.00	600	1171	531	3522	3480	4000	3.20
T486066	650/65-26.5 TT	20 SF	20.00	650	1485	674	4461	7170	8250	5.00



nokian *FOREST KING T*

Heavyweight professional

- The only special tyre for heavy tractor-based forestry machines on the market - also for skidders
- In addition to normal wood harvesting, this tyre is suitable for tasks involving the clearing and scarifying of forest terrain
- Good cleaning properties and friendly to the terrain
- Due to its large lug angle, it is well suited for transportation on roads



nokian *TR FOREST*

Reliable choice for tractors in forestry use

- A special tyre for versatile forestry use of agricultural tractors
- Strong cross-ply construction and tread pattern with good cleaning properties
- Tread rubber compound designed particularly for forestry use



nokian *TR MULTIPLUS RADIAL*

Tyre for light forestry use

- Strong, multi-purpose radial tyre from the 65 series
- Good grip and self-cleaning tread pattern
- Due to its radial construction, it is quick and comfortable in transportation
- Suitable for light forestry, agriculture and earth-moving



Tough Tyres - Tractor Forest King 'T'

Nokian Tractor Forest King T Tyres

Nokian Product Code	Dimension	Load Index	Rim	Section mm	Diameter mm	Static Load Radius mm $\pm 2.5\%$	Rolling Circ mm $\pm 2.5\%$	40km/h Load kg	10km/h Load kg	Inflation Pressure bar
T445314	540/70-30 TT	152A8/159A2	DW16L	540	1515	705	4505	3550	4375	2.40
T445313	650/75-38 TT	168A8/175A2	DW20A	650	1965	900	5890	5600	6900	2.40

TR Forest Standard Range - Series 80

Nokian TR Forest Standard Range - Series 80 Tyres

Nokian Product Code	Dimension	PR	Load Index	Rim	Section mm	Diameter mm	Rolling Circ mm $\pm 2.5\%$	40km/h		10km/h	
								Load kg	Inf Pres bar	Load kg	Inf Pres bar
T482192	12.4-24 TT	12	128 A8	W11	315	1160	3443	1800	3.50	1820	2.40
T482198	13.6-24 TT	10	128 A8	W12	345	1210	3512	1800	2.50	1790	2.30
T482220	14.9-24 TT	14	138 A8	W13	378	1265	3707	2360	3.00	2375	2.30
T483150	13.6-28 TT	10	130 A8	W12	345	1310	3934	1900	2.70	1910	2.30
T445409	14.9-28 TT	14	140 A8	W13	378	1365	4065	2285	3.00	2530	2.30
T483301	16.9-28 TT	14	145 A8	DW15	429	1435	4278	2900	2.60	2860	2.40
T483810	16.9-30 TT	14	144 A8	W15L	429	1485	4361	2800	2.60	2850	2.00
T484390	16.9-34 TT	14	146 A8	W15L	429	1585	4599	3000	2.60	3025	2.00
T484420	18.4-34 TT	14	154 A8	W16	467	1650	4825	3750	2.60	3730	1.80
T485430	18.4-38 TT	14	155 A8	W16L	467	1750	5150	3875	2.60	3890	1.80
T485450	20.8-38 TT	14	159 A8	W18L	528	1840	5400	4375	2.30	4340	1.80

TR Multiplus Radial - Series 65

Nokian TR Multiplus Radial - Series 65 Tyres

Nokian Product Code	Dimension	Load Index	Rim	Section mm	Diameter mm	Rolling Circ mm $\pm 2.5\%$	40km/h load kg	50km/h load kg	Inflation Press. bar
T445411	500/65 R 28 TL	141 B	W15L	492	1345	4055	2360	2120	1.60
T445412	540/65 R 28 TL	146 B	DW16	530	1413	4255	2650	2430	1.60
T445414	600/65 R 38 TL	156 B	DW18L	591	1745	5280	3650	3350	1.60
T445415	650/65 R 38 TL	160 B	DW20A	645	1811	5490	4125	3750	1.60






**New
Range**

Nordman Forest Tyres

Developed as a cost effective alternative for replacement tyres in the market, the Nordman range employs Nokian's tried and tested crossply construction with a similar tread pattern and tyre profile to the TRS L-2, making it compatible with existing TRS tracks.

The new NORDMAN range is available in the most popular tyre sizes in heavy ply ratings.

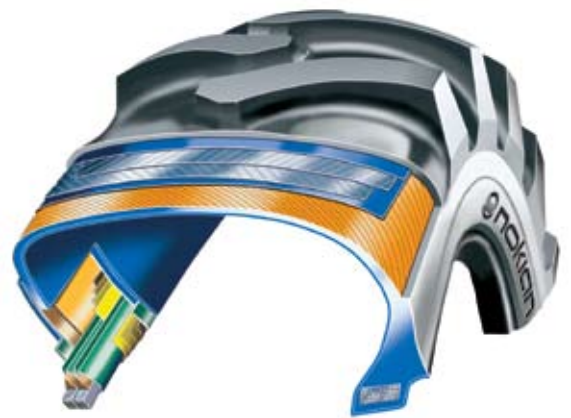

nokian
NORDMAN FOREST

Nokian Product Code	Tyre Size	Ply Rating	Rim Size	Tyre Width mm	Tyre Diameter mm	Inflation Pressure Without Tracks		Inflation Pressure With Tracks	
						bar	psi	bar	psi
T445473	600/55-26.5 TT	16	AG20.00	600	1340	4.0	58	4.0	58
T445474	710/45-26.5 TT	16	AG24.00	710	1340	4.0	58	4.0	58
T445475	600/65-34 TT	20	DW20B	600	1644	3.2	46	3.6	52
T445476	700/55-34 TT	20	DW24B	700	1630	3.2	46	3.6	52

750/55-26.5 PR 20 Available soon

Nordman – A Cost Effective Tyre For The After Market

Wheel Repair - We Can Repair Worn And Damaged Wheels




New Wheel Rims

Centre Flange Plates

Weld In Repair Discs

Shotblasting & Painting

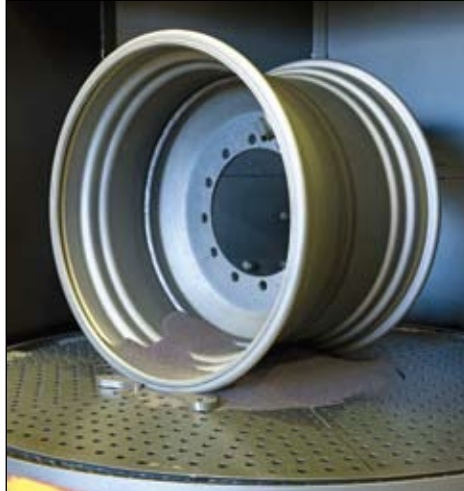

A frequent problem when wheel studs break or run slack is damaged or worn stud holes in the centre flange plate. We can cut out and replace damaged centre flanges and weld in a new alloy steel repair disc.



New Wheels & Wheel Modifications

We can supply new reinforced forestry specification wheels with standard or special offset to fit most tyre sizes. We also offer a wheel modification service where centre flanges can be modified or re-positioned within the wheel to increase or decrease wheel offset and machine width. Wheels can then be shotblasted and painted. We can also supply wheel spare parts... bare rims, centre flanges, repair discs and valve guards.

Rim Size Availability

20.00 - 22.5

24.00 - 22.5

20.00 - 26.5

24.00 - 26.5

28.00 - 26.5

DW20A

DW24A

**nokian
HEAVY TYRES**

Nokian Valve Guards

We stock Nokian heavy duty nylon screw-in valve protection guards.



Research has found that approximately 50% of tyres working in the field are operating at under inflated tyre pressures. Low tyre pressure damages tyres, shortens tyre life, allows tracks and chains to fall off, increases fuel consumption and can increase the risk of accidents.



Nokian Tyre Pressure Warning System




**nokian
HEAVY TYRES**

The Nokian LED Tyre Pressure Warning Sensor is a simple, robust, low pressure warning system specially designed for forest machines.

The system is supplied in a kit suitable for four tyres, consisting of four sensors and four translucent valve guards. It is easily installed by first inflating the tyre to the correct pressure, then fitting the warning sensors to the tyre valves before replacing the standard valve guards with the translucent valve guards supplied in the kit.

If the tyre pressure drops by 8psi (0.6bar) the LED indicator will flash, providing the operator with an early tyre pressure warning.

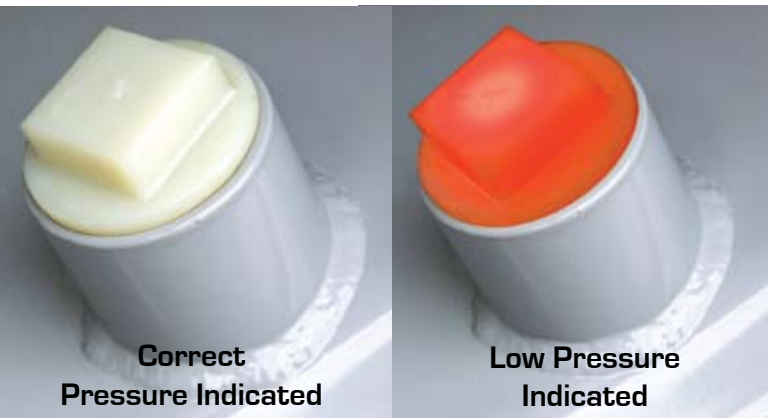

Part Number	Tyre Size
T 55094	400/55-22.5
T 55096	500/60-22.5
T 55089	600/50-22.5
T 55092	700/45-22.5
T 55097	500/60-26.5
T 55098	600/55-26.5
T 55099	700/50-26.5
T 55099	710/45-26.5
T 55102	650/65-26.5
T 55102	750/55-26.5
T 545312	800/40-26.5
T 55388	700/70-34
T 55394	700/55-34
T 55394	600/65-34

Nokian Tyre Tubes

We Hold Extensive Stocks Of Nokian Forestry Tyre Tubes In Most Popular Sizes

**nokian
HEAVY TYRES**

